


FUSION WAY OIL 68 & 220

Way Oil

DESCRIPTION

Fusion WAY OIL lubricant comes in two viscosities. The Way Oil 68 is recommended when a medium weight slideway lubricant is required. The Way Oil 220 is recommended when a heavy viscosity slideway lubricant is required. Fusion Way Oils contain special non-corrosive additives which protect and lubricate the machine tool ways and eliminate the occurrence of stickslip.

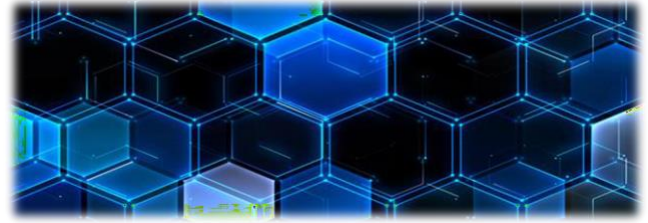

FEATURES/BENEFITS

- Non-Detergent
- Does not emulsify with the machine coolants
- Excellent Metal Wetting & Adhesiveness
- Superior Lubrication
- Eliminates Chatter & Scoring

TYPICAL ANALYSIS

	WAY OIL 68	WAY OIL 220
GRAVITY, API:.....	27.6.....	24.6
POUNDS PER GALLON:	7.4	7.6
FLASH POINT (°F):.....	360.....	410
VISCOSITY, CST at 40 C:.....	61.2 - 74.8.....	198 - 242
VISCOSITY, SUS at 100 F:	348	1186
POUR POINT (°F):	0	0
STICK-SLIP COEFFICIENT RATIO, MAX (2):	0.8.....	0.8
ISO VG NUMBER.....	.68.....	220

AVAILABILITY

- 5 gallon pails
- 55 gallon drums
- 330 gallon totes
- Bulk shipments

HEALTH AND SAFETY

Refer to SDS (available upon request) for proper handling and disposal, and should be handled in accordance with local, state, and federal requirements. Purchasers of this product are urged to review and retain this information. For additional information, evaluation samples or price quotations, please contact Fusion Chemical.



Fusion Chemical Corporation
99 E. Joe St. Huntington, IN. 46750
260.443.1154

This document contains information based on data that is believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made herein with respect to the products described and we assume no responsibility for the results or the use thereof.